INSTRUCTIONS

1. UNROLL

SIMPLY KICK AND UNROLL.

KEEP THE EMBOSSED HEXA


SURFACE FACING UP AND THE

PLAIN SURFACE FACING DOWN.




2. CUT TO FIT

LIFT GATOR GAURD UP AND AWAY FROM THE FLOOR TO CUT THE PRODUCT WITH A UTILITY KNIFE OR SCISSORS.

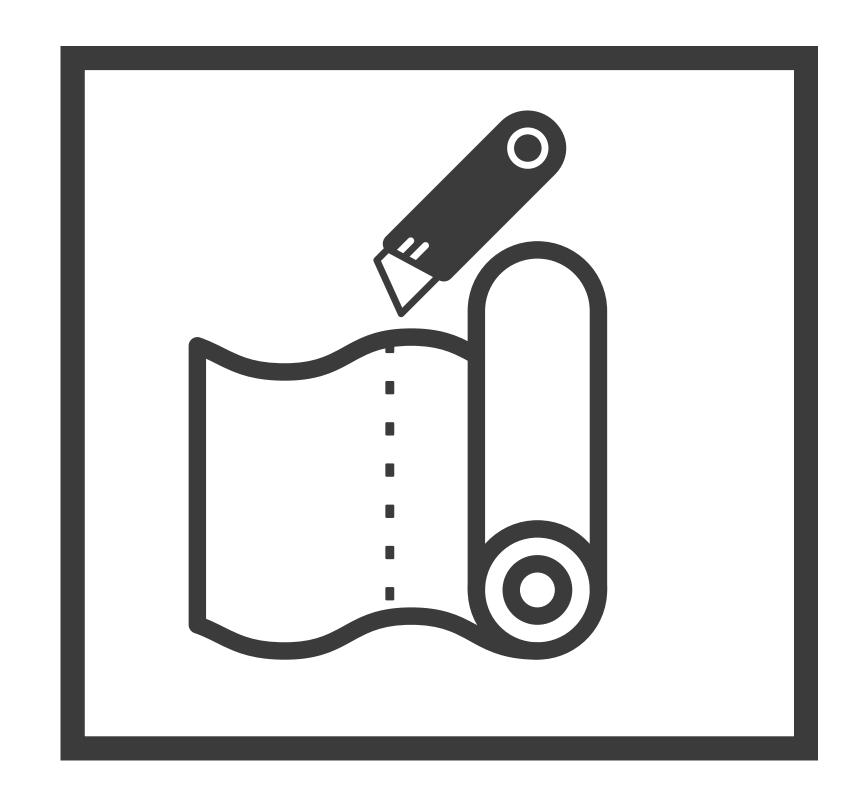

3. SECURE WITH GATOR HEXAGRIP TAPE

SECURE EDGES TO THE FLOOR WITH GATOR HEXA GRIP TAPE OR NON-MARKING TAPE.

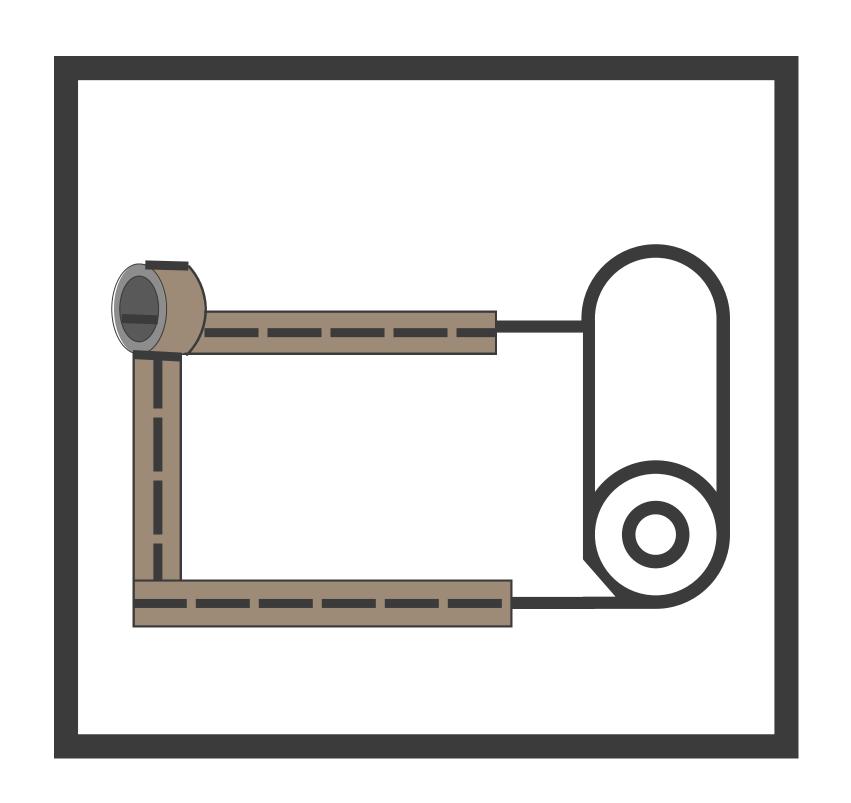

4. OVERLAP & REPEAT

OVERLAP BETWEEN INDICATION
LINES NEAR THE OUTER EDGE OF
THE ROLL AND SECURE WITH GATOR
HEXA GRIP TAPE.

